

Suits your No-Hub
installations to a "T"



IDEAL® No-Hub Torque Wrenches

Installing a No-Hub coupling at its specified torque is crucial in obtaining a proper seal. IDEAL® No-Hub Torque Wrenches help insure proper torque installation the first time, every time. Unlike other tools, our durable T-handle wrenches are specially designed to stop tightening when the pre-set torque is reached. Even with continued turning. This prevents potential damage to the coupling.

To make installation even easier, IDEAL's Torque Wrenches are color-keyed to match the corresponding No-Hub colors – black, yellow, or green. You won't even have to think about the torque specification. And our enhanced grip handles help reduce fatigue. Make sure you have the proper tools for the job – IDEAL No-Hub Torque Wrenches.

IDEAL • 3200 Parker Drive • St. Augustine, FL 32084-0897
Telephone: 904-829-1000 • Fax: 904-825-1121
www.idealclamp.com

A Tomkins Company



IDEAL® No-Hub Couplings and Color-Keyed Torque Wrenches - Precision Engineered for Superior Performance

IDEAL No-Hub Torque Wrenches are color-keyed to match the corresponding No-Hub Coupling. This insures correct socket/drive size and torque specification for proper installation.



8-9995
Standard No-Hub Torque Wrench
 60 in.-lbs. 5/16" hex drive



8-9996
Medium Duty No-Hub Torque Wrench
 80 in.-lbs. 5/16" hex drive




8-9997
Heavy Duty No-Hub Torque Wrench
 80 in.-lbs. 3/8" hex drive

With IDEAL No-Hub couplings, the job is secure, and so is your reputation.

IDEAL couplings are listed or certified by all major plumbing-code bodies throughout the U.S. and Canada, and conform to CISPI standard 310; Factory Mutual FM 1680; ASTM C564; ASTM C1277; IAPMO file #3198; Commonwealth of Massachusetts CMR-248, and City of New York MEA 253-98-E. Gaskets are made from an elastomeric compound that meets the requirements of ASTM C564. IDEAL offers Standard, MD, HD and 12" & 15" designs.

High-Torque Clamps
Patented Bi-Directional Shield Design

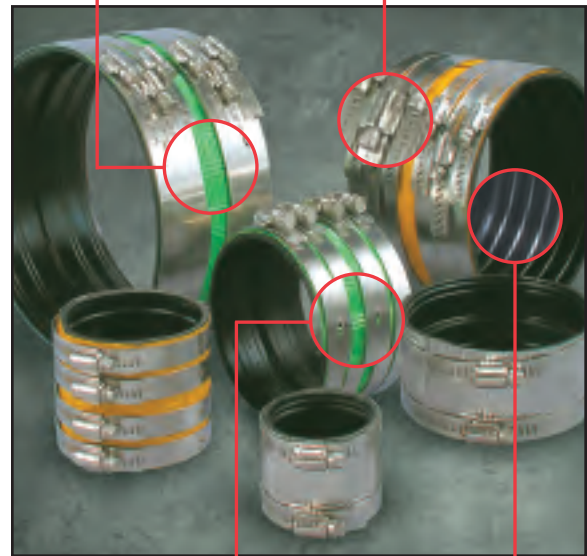

Floating Eyelet Design
Specialty Ribbed Neoprene Gasket

For more than 30 years, IDEAL® has been making No-Hub couplings and industrial strength fasteners for the biggest and most recognized names in the business, making them one of the largest manufacturers in the world.

Form No. 3239000



A Tomkins Company

